


TYPE 5 - CONCRETE BRIDGE PARAPET

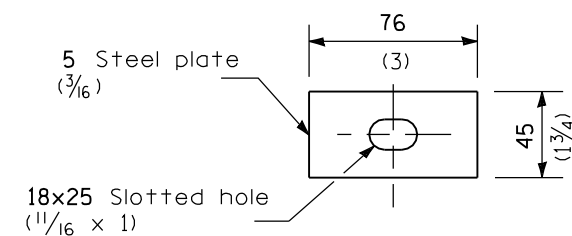

NOTE

Plate washer F shall be used on type A guardrail only where specified. Plate washer F shall be used at all other locations where rail element is bolted to a block-out unless otherwise noted.

PLATE WASHER F

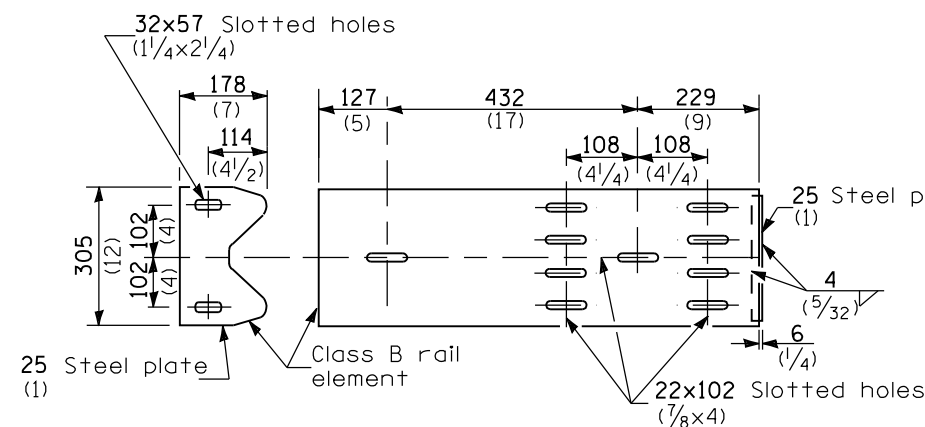


PLATE G


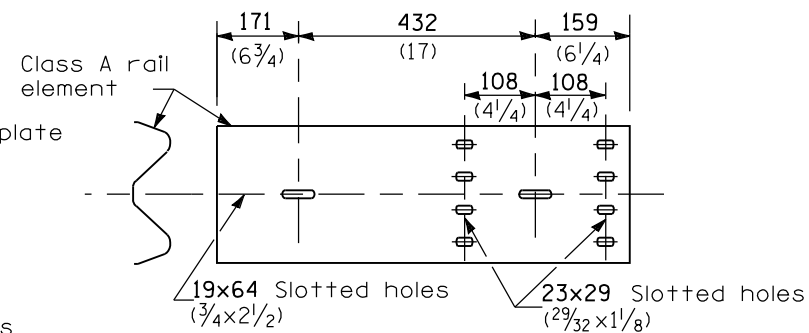


PLATE E

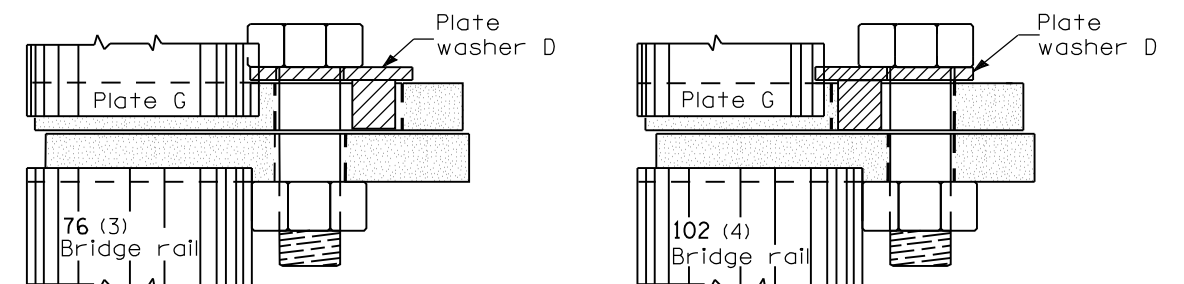

PLACEMENT OF PLATE WASHER D

(PLAN)

GENERAL NOTES

Install plate washer D so that the 25 mm (1") projection fills the remainder of the slotted holes in the 25 mm (1") end plate on plate G after the M24 (1") dia. bolts are in place.

* Bolts shall be provided with locknut or double nut and shall be tightened only to a point that will allow plate G to be free to move when an expansion joint exists below the connector.

See Standard 630001 for details of guardrail not shown.

All dimensions are in millimeters (inches) unless otherwise shown.


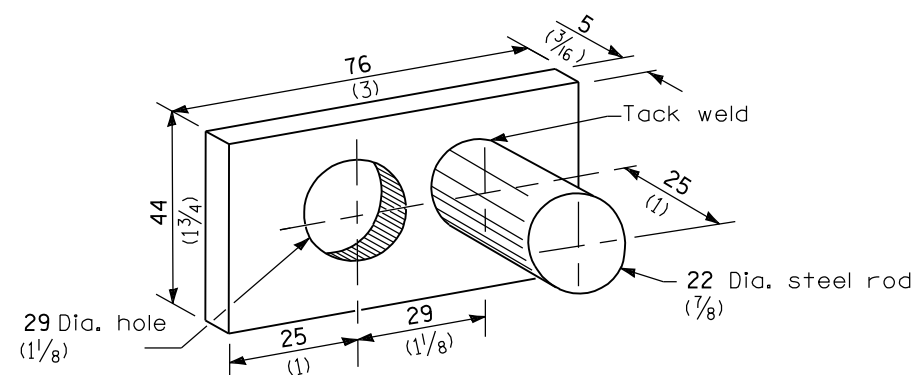


PLATE WASHER D

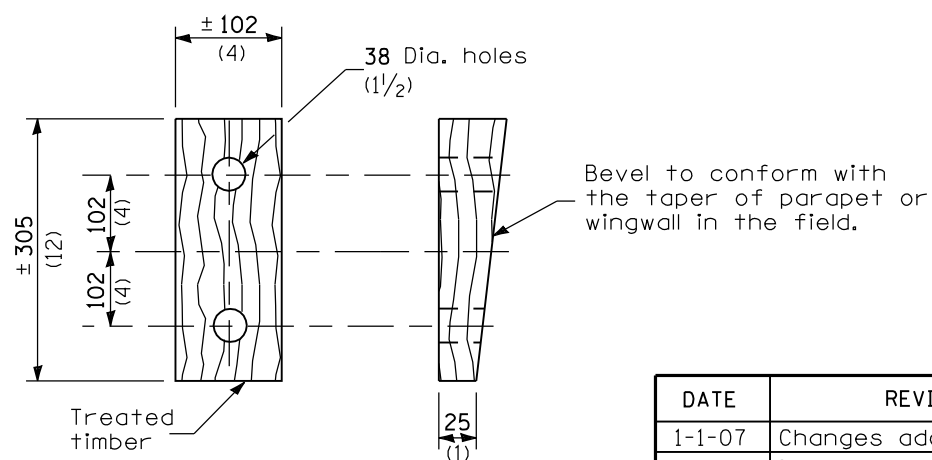

WEDGE M

DATE	REVISIONS
1-1-07	Changes adopted to
	implement the Midwest
	Guardrail System.
1-1-00	Removed "A" Plates.

**TRAFFIC BARRIER
TERMINAL, TYPE 5**

STANDARD 631026-03

Illinois Department of Transportation

PASSED January 1, 2007

ENGINEER OF POLICY AND PROCEDURES

APPROVED January 1, 2007

ENGINEER OF DESIGN AND ENVIRONMENT

ISSUED 1-1-97